



舟山市豪立德泵业有限公司
Zhuoshan Haolide Pump Industry Co.,Ltd

浙江省 舟山市 定海区 马岙工业园区三江大道 79 号
No. 79, Sanjiang Avenue, Ma'ao Industry Zone, Dinghai, Zhoushan, China

舟山市沃尔特泳池设备有限公司
Zhoushan Walter Swimming Pool Equipment Co.,Ltd.

浙江省 舟山市 定海区 马岙工业园区三江大道 79-2 号
No. 79-2, Sanjiang Avenue, Ma'ao Industry Zone, Dinghai, Zhoushan, China
T: +86-0580-8082896 / 2269588

F: 0580-2269566 E: 1536266183@qq.com
E: info@walterpool.com.cn

www.walterpool.com



源自西班牙的一流技术
TECHNOLOGY FROM SPAIN

舟山市豪立德泵业有限公司
ZHUOSHAN HAOLIDE PUMP
INDUSTRY CO.,LTD





ABOUT US

关于我们

舟山市豪立德泵业有限公司 2004 年成立集研发、设计、生产、销售于一体，主要生产自吸式循环过滤水泵及高压鼓风机，公司拥有专业的员工团队和超卓的设备，不断深化内部管理，积极改革创新，坚持走品牌化路线，西班牙授权生产品牌为凯迪斯顿（CADISDON），自主品牌有沛力德（porid）和豪立（HAOLI）等。

舟山市豪立德泵业有限公司主要生产玻璃纤维过滤砂缸、臭氧反应罐、吸附罐、地埋式一体化循环过滤设备等。广泛应用于桑拿、温泉、SPA、游泳池、水上乐园、海洋馆、水族池、水产养殖及雨水、河水、工业水处理领域等。

我们通过了国家质检认证、疾控检测认证、环保认证、3C 认证、CE 认证等多项认证，保障产品质量，提升企业核心竞争力，“品质至尊，诚信务实，开拓创新，客户至上”让我们的营销网络遍及全球，我们努力研发生产高品质的产品，为客户提供优质完善的服务。



Zhuoshan Haolide Pump Industry Co.,Ltd was established in 2004 with the company background of design, produce and selling. We mainly produce self-absorption water circulation pumps and high voltage air blowers. With professional work team and excellent equipments, we constantly strengthen internal management, actively reform and innovate, insisting development of our own brand line. Under our company, we have Spain brand Cadisdon, and domestic brand Porlid and Haoli.

Since 2010, we started to produce FRP sand filters, ozone tanks, adsorption tanks, underground integration equipments and etc. Our products are widely used in Sauna, hot spring, SPA, swimming pool, ocean parks, aquarium aquaculture rain river industry water treatment and etc.

We're qualified with international and domestic certificates of disease control, environment-friendly, 3C, CE and etc. By insisting on policy of "Quality Guarantee, Trust Pragmatic, Positive innovation, Customer Oriented", we bring our marketing work net all over the world. We make efforts to research and develop high-performance products, and provide perfect service to all over world customer.

CONTENTS

WATER PUMPSERIES

- 03 ELS water pump
- 05 HLB water pump
- 07 HQS water pump
- 09 HQ water pump
- 11 CN plastic pump
- 13 CD plastic pump
- 15 BL/BD plastic pump
- 17 HL water pump
- 19 HLA water pump
- 20 HLD water pump
- 21 CU type metal water pump
- 23 CUD type metal water pump
- 25 FD type metal water pump
- 27 FDU type metal water pump
- 29 FU type metal water pump
- 31 H/HS type metal water pump
- 33 BLB type metal water pump

THE SAND FILTER

- 37 CT series top mount sand filter
- 39 CS series side mount sand filter
- 41 CB series top mount of deep bed sand filter
- 43 BA series side mount of deep bed sand filter
- 45 CD/DA series depth sand filter
- 47 CC series commercial sand filter
- 49 CL series horizontal sand filter
- 51 CP top mount sand filter with pump combo
- 53 CPS side mount sand filter with pump combo
- 55 CU underground integration equipment
- 57 CF underground integration equipment
- 59 CTT underground integration equipment
- 61 CPP underground integration equipment

AIR COMPRESSOR SERIES

- 67 Single stage single phase side channel air blower
- 68 Single stage three phase side channel air blower
- 69 Single stage three phase side channel air blower

ACCESSORIES SERIES

- 71 HQS-HQ Type Pump Accessories
- 73 HL Type Pump Accessories
- 75 Multiport Valve
- 76 Cylinder Head Parts
- 77 Sand Cylinder Parts

水泵系列

- 03 ELS 型水泵
- 05 HLB 系列桑拿泳池水泵
- 07 HQS 型水泵
- 09 HQ 型水泵
- 11 CN 大塑料水泵
- 13 CD 大塑料水泵
- 15 BL/BD 系列水泵
- 17 HL 型水泵
- 19 HLA 型水泵
- 20 HLD 型水泵
- 21 CU 系列不锈钢泵
- 23 CUD 系列不锈钢泵
- 25 FD 系列铁水泵
- 27 FDU 系列铁水泵
- 29 FU 系列铁水泵
- 31 H/HS 系列铸铁泵
- 33 BLB 大功率塑料泵

砂缸系列

- 37 CT 系列顶出砂缸
- 39 CS 系列侧出砂缸
- 41 CB 系列顶出高密度砂缸
- 43 BA 系列侧出高密度砂缸
- 45 CD/DA 系列深层过滤砂缸
- 47 CC 系列商用大型砂缸
- 49 CL 系列商用卧式砂缸
- 51 CP 系列顶出砂缸连泵一体化
- 53 CPS 系列侧出砂缸连泵一体化
- 55 CU 系列地理式一体化
- 57 CF 系列地理式一体化
- 59 CTT 系列顶出式热塑缸
- 61 CPP 系列顶出式热塑缸连泵

风泵系列

- 67 单级单相旋涡式鼓风机
- 68 单级三相旋涡式鼓风机
- 69 单级三相旋涡式鼓风机系列

配件

- 71 HQS-HQ 型水泵配件
- 73 HL 型水泵配件
- 75 多功能阀门
- 76 缸头配件
- 77 砂缸配件


HLB 系列桑拿泳池水泵

HLB Water Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.

防锈保护外壳，防止水份渗入马达内部；功率足，扬程高，水量大，高效率循环，噪音小，运行宁静；泵盖有真空密封性，防水性能好，吸污能力强，毛发器容量大；水泵主要配件由耐高温、低温的特殊塑料制成，持久耐用；操作方便，便于维修，有零配件供应

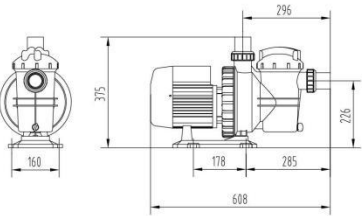


Model	Voltage	Power		Hmax(m)	Qmax(m³/h)	Port Size(mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HLB-100	220V/50Hz	0.75	1	7	16.5	50 1.5"
HLB-150		1.1	1.5	8.5	18.5	
HLB-200		1.5	2	10	21	
HLB-300		2.2	3	13	25	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

HLB Water Pump Technical Characteristic

HLB 型水泵分解图

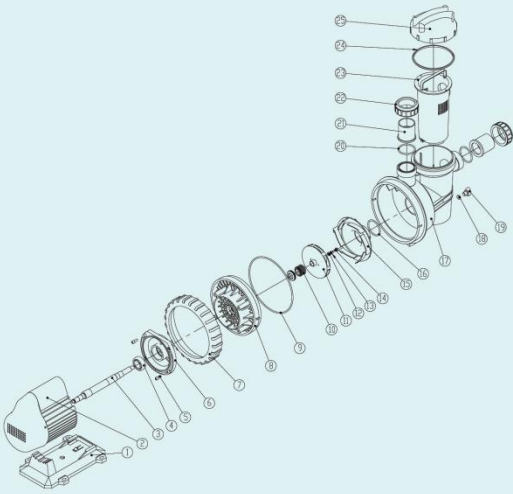

- 01 Base 底座

02 Motor 电机

03 Motor Base 电机轴

04 Bearing 轴承

05 Bolt 螺钉

06 Flange 电机法兰

07 Bolt Cap 大螺母

08 Plate 法兰盘

09 O ring O 型密封圈

10 Mechanical Seal 机械密封

11 Impellor 叶轮

12 Cushion 平垫圈

13 Spring Washer 弹性垫圈

14 Bolt 螺栓

15 Throw Water Ring 甩水器

16 O ring O 型密封圈

17 Pump Body 泵体

18 O ring O 型密封圈

19 Bolt 螺塞
- 20 O ring O 型密封圈

21 Lining 衬套

22 Cap 活接螺母

23 Filter Basket 过滤篮

24 Seal Ring 密封圈

25 Transparent Lid 透明盖


ELS 型水泵

ELS Water Pump




Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.

防锈保护外壳，防止水份渗入马达内部；功率足，扬程高，水量大，高效率循环，噪音小，运行宁静；泵盖有真空密封性，防水性能好，吸污能力强。毛发器容量大；水泵主要配件由耐高温，低温的特殊塑料制成，持久耐用；操作方便，便于维修，有零配件供应。

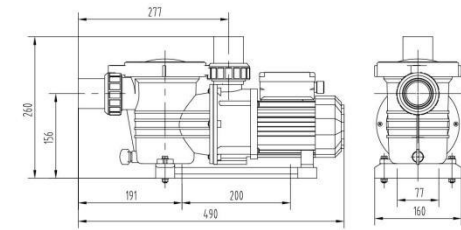

Model	Voltage	Power		Hmax	Qmax	Port Size
型号	电压 (V)	KW	HP	最大扬程 (m)	最大流量 (m³/h)	管径 (mm)
ELS-180	220V/50Hz	0.18	0.25	5	8.4	50 1.5"
ELS-250		0.25	0.35	8	9.6	
ELS-370		0.37	0.5	11	12.6	
ELS-550		0.55	0.75	10.5	14.4	
ELS-750		0.75	1	11	16.5	
ELS-900		0.9	1.2	22	18	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

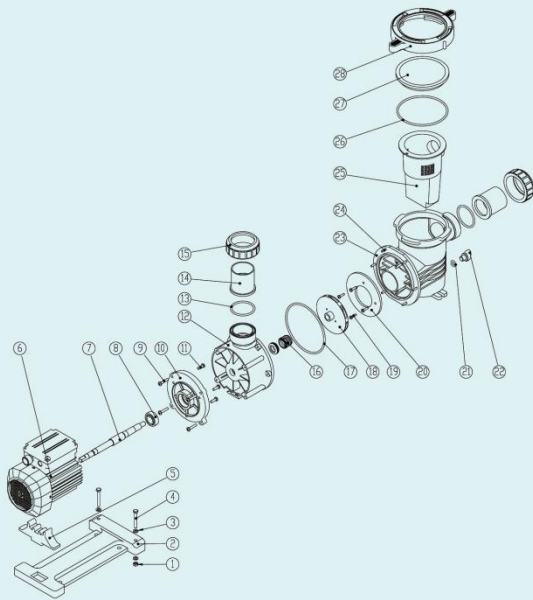

ELS Water Pump Technical Characteristics

ELS 型水泵分解图

- 01 Cap 螺母

02 Motor base 电机底座

03 Cushion 平垫圈

04 Bolt 螺栓

05 Base Plug 底部内塞

06 Motor 电机

07 Motor Axis 电机轴

08 Bearing 轴承

09 Bolt 螺钉

10 Flange 电机法兰

11 Bolt 螺钉

12 Pump Body 泵体

13 O ring O 型密封圈

14 Lining 衬套

15 Joing Cap 活接螺母

16 Mechanical Seal 机械密封

17 O ring O 型密封圈

18 Impellor 叶轮

19 Bolt 自攻螺钉

20 Lining 内衬板

21 O ring O 型密封圈

22 Plug 螺塞

23 Body 桶体
- 24 Bolt 螺钉

25 Filter Basket 过滤篮

26 O ring O 型密封圈

27 Transparent Lid 透明盖

28 Lid Cover 桶体盖



HQS 型水泵

HQS Water Pump




Anti-rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.

防锈保护外壳,防止水份渗入马达内部;功率足,扬程高,水量大,高效率循环,噪音小,运行宁静;泵盖有真空密封性,防漏水性能好,吸污能力强。毛发微容污量大;水泵主要配件由耐高温,低温的特殊塑料制成,持久耐用;操作方便,便于维修。有零配件供应。

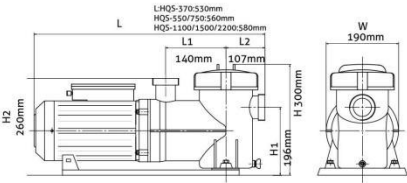

Model	Voltage	Power	HP	Hmax(m)	Qmax(m³/h)	Port Size(mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HQS-370	220V/50Hz	0.37	0.50	8	11	50 1.5"
HQS-550		0.55	0.75	12	16	
HQS-750		0.75	1.0	13	17	
HQS-1100		1.1	1.5	15	21	
HQS-1500		1.5	2.0	16	25	

以上数据仅供参考,以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

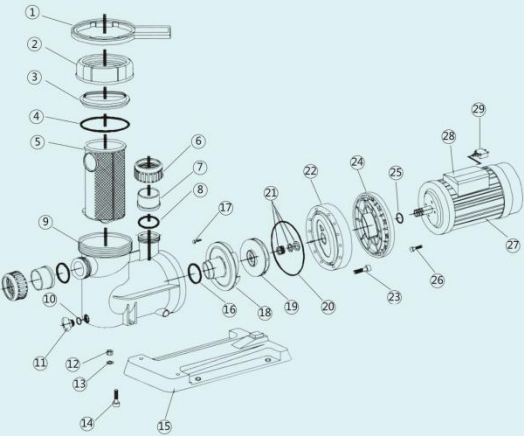

HQS Water Pump Technical Characteristic

HQS 型水泵分解图

- 01 Plastic Spanner 塑料扳手

02 Lid Lock Ring 大螺帽

03 Lid 透明盖

04 O' ring O 型密封圈

05 Basket 过滤篮

06 Union Nut 活接螺帽

07 Union Bushing(Metric/ Inch) 活接衬套 (公/英制)

08 O' ring O 型密封圈

09 Pump body 泵体

10 O' rirt9 O 型密封圈

11 Drain Plug 排水螺丝

12 Nut 螺母

13 Gasket 垫片

14 Screw(8*30mm) 螺丝(外六角)

15 Base 底座

16 O'ring O 型密封圈

17 Screw 螺丝

18 Diffuser 散水器
- 19 impeller 叶轮

20 O'ring O 型密封圈

21 Shaft Seal 机械密封

22 Flange 法兰

23 Screw 螺丝(外六角)

24 Flange 法兰

25 R ejection Water Ring 甩水环

26 Screw 螺丝(外六角)

27 Motor 马达

28 Junction Box 接线盒

29 Electric Current Safeguard 过热保护器



HQ 型水泵

HQ Water Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.

防锈保护外壳，防止水分渗入马达内部。功率足、扬程高、水量大，高效率循环。低噪音，运行稳定。泵盖有真空密封性，防水性能好，毛发器容量大。水泵主要配件由耐高温低温的高强度塑料制造而成。持久耐用，是别墅·私家及商用泳池、水景、养殖、温泉桑拿浴池的理想选择。

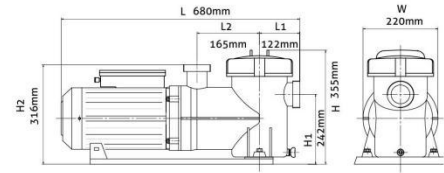


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HQ-150	220V	1.1	1.5	18	25	63 2"
HQ-200		1.5	2.0	20	35	
HQ-300	380V/50Hz	2.2	3.0	21	38	
HQ-350	380V/50Hz	2.6	3.5	22	40	
HQ-400		3.0	4.0	23	45	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

HQ Water Pump Technical Characteristic

HQ 型水泵分解图

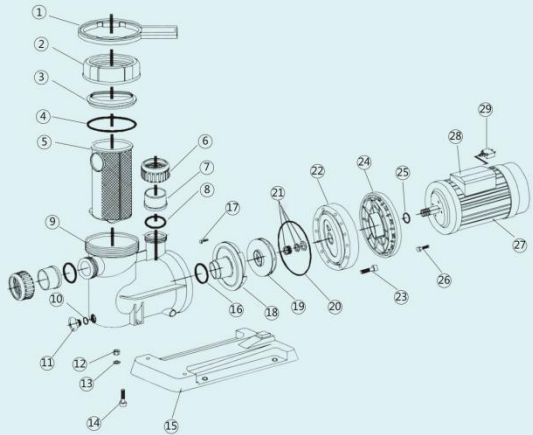

- 01 Plastic Spanner 塑料扳手

02 Lid Lock Ring 大螺帽

03 Lid 透明盖

04 O' ring O 型密封圈

05 Basket 过滤篮

06 Union Nut 活接螺帽

07 Union Bushing(Metric/ Inch) 活接衬套 (公/英制)

08 O' ring O 型密封圈

09 Pump body 泵体

10 O' rirt9 O 型密封圈

11 Drain Plug 排水螺丝

12 Nut 螺母

13 Gasket 垫片

14 Screw(8*30mm) 螺丝(外六角)

15 Base 底座

16 O'ring O 型密封圈

17 Screw 螺丝

18 Diffuser 散水器
- 19 impeller 叶轮

20 O'ring O 型密封圈

21 Shaft Seal 机械密封

22 Flange 法兰

23 Screw 螺丝 (外六角)

24 Flange 法兰

25 R ejection Water Ring 甩水环

26 Screw 螺丝 (外六角)

27 Motor 马达

28 Junction Box 接线盒

29 Electric Current Safeguard 过热保护器


CN 大塑料水泵

CN Plastic Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.

防锈保护外壳，防止水分渗入马达内部。功率足、扬程高、水量大，高效率循环。低噪音，运行稳定，泵盖有真空密封性，防水性能好，毛发器容量大。水泵主要配件由耐高低温的高强度塑料制造而成，持久耐用，是别墅·私家及商用泳池，水景、养殖、温泉桑拿浴池的理想选择。

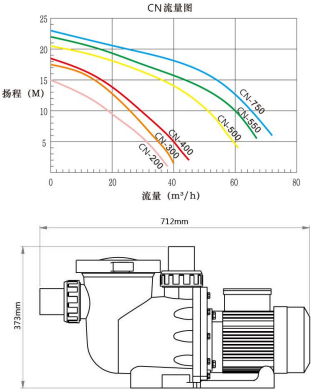


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size	
型号	电压 (V)	KW	HP	最大扬程	最大流量	(mm)	(inches)
CN-200	1.5	2	220V/380V/50Hz	18	35	63	2"
CN-300	2.2	3		20	38		
CN-400	3	4	380V/50Hz	20	45	63/75	2"/2.5"
CN-500	3.8	5		21	50		
CN-550	4	5.5		22	60	75	
CN-750	5.5	7.5		22	75		

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

CN Water Pump Technical Characteristics


CN 系列水泵分解图

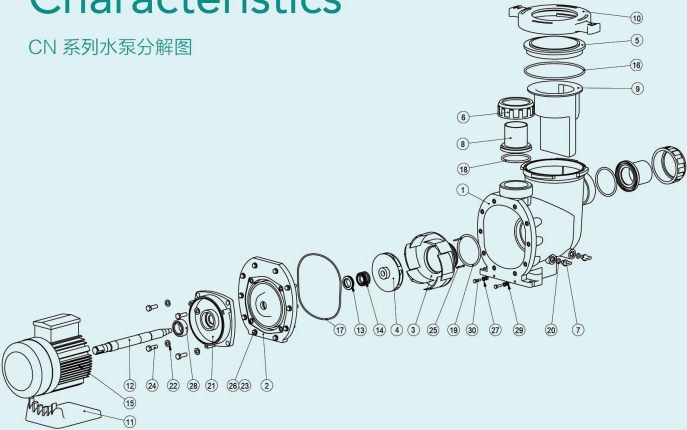

- 01 Body 桶体
- 02 Flange 连接法兰
- 03 Throw Water Ring 散水器
- 04 Impellor 叶轮
- 05 Transparent Lid 透明盖
- 06 Union Cap 连接消盖
- 07 Plug 螺塞
- 08 Lining 衬套
- 09 Filter Basket 过滤器
- 10 Cap 大螺母
- 11 Base 底座
- 12 Motor Axis 电机轴
- 13 Ring 静环
- 14 Ring 动环
- 15 Motor 电机
- 16 O ring O 型圈
- 17 O ring O 型圈
- 18 O ring O 型圈
- 19 O ring O 型圈
- 20 O ring O 型圈
- 21 Flange 法兰
- 22 Washer 垫圈
- 23 Washer 垫圈
- 24 Bolt 螺栓
- 25 Bolt 螺栓
- 26 Bolt 螺栓
- 27 Washer 垫圈
- 28 Bearing 轴承
- 29 Cap 螺母
- 30 Plug 螺柱

CD 大塑料水泵

CD Plastic Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.


防锈保护外壳，防止水分渗入马达内部。功率足、扬程高、水量大，高效率循环。低噪音，运行稳定。泵盖有真空密封性，防水性能好，毛发器容量大。水泵主要配件由耐高温高湿的高强度塑料制造而成。持久耐用，是别墅、私家及商用泳池、水景、养殖、温泉桑拿浴池的理想选择。

Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
CD-200	220V/380V/50Hz	1.5	2	18	35	63 2"
CD-300		2.2	3	20	40	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

CD Water Pump Technical Characteristics

CD 系列水泵分解图

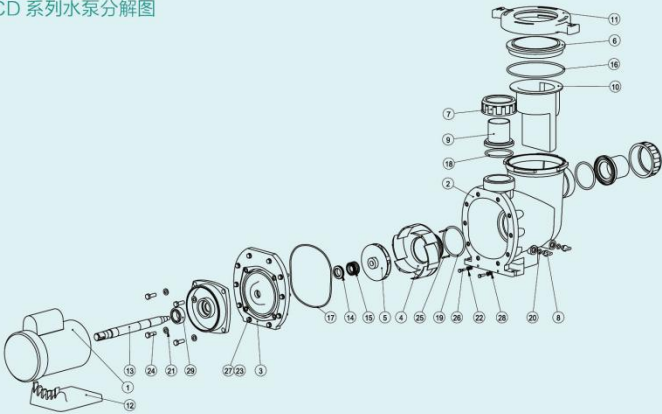

- 01 Motor 电机
- 02 Body 桶体
- 03 Union Flange 连接法兰
- 04 Throw Water Ring 散水器
- 05 Impellor 叶轮
- 06 Transparent Lid 透明盖
- 07 Union Cap 活接端盖
- 08 Plug 螺塞
- 09 Lining 衬套
- 10 Filter Basket 过滤篮
- 11 Cap 大螺母
- 12 Base 底座
- 13 Motor Axis 电机轴
- 14 Ring 静环
- 15 Ring 动环
- 16 O ring O 型圈
- 17 O ring O 型圈
- 18 O ring O 型圈
- 19 O ring O 型圈
- 20 O ring O 型圈
- 21 Washer 垫圈
- 22 Washer 垫圈
- 23 Washer 垫圈
- 24 Bolt 螺栓
- 25 Bolt 螺栓
- 26 Bolt 螺栓
- 27 Bolt 螺栓
- 28 Cap 螺母
- 29 Bearing 轴承


BLS 型水泵

BLS Water Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.

防锈保护外壳,防止水份渗入马达内部;功率足,扬程高,水量大,高效率循环,噪音小,运行宁静;。泵盖有真空密封性,防漏水性能好,吸污能力强,毛发微容污量大;水泵主要配件由耐高温,低温的特殊塑料制成,持久耐用;操作方便,便于维修,有零配件供应。

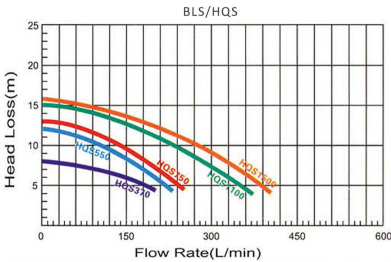


Model	Voltage	Power		Hmax(m)	Qmax(m³/h)	Port Size(mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
BLS-370	220V/50Hz	0.37	0.50	8	11	50 1.5"
BLS-550		0.55	0.75	12	16	
BLS-750		0.75	1.0	13	17	
BLS-1100		1.1	1.5	15	21	
BLS-1500		1.5	2.0	16	25	

以上数据仅供参考,以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

BLS Water Pump Technical Characteristics

BL/BD 系列水泵分解图

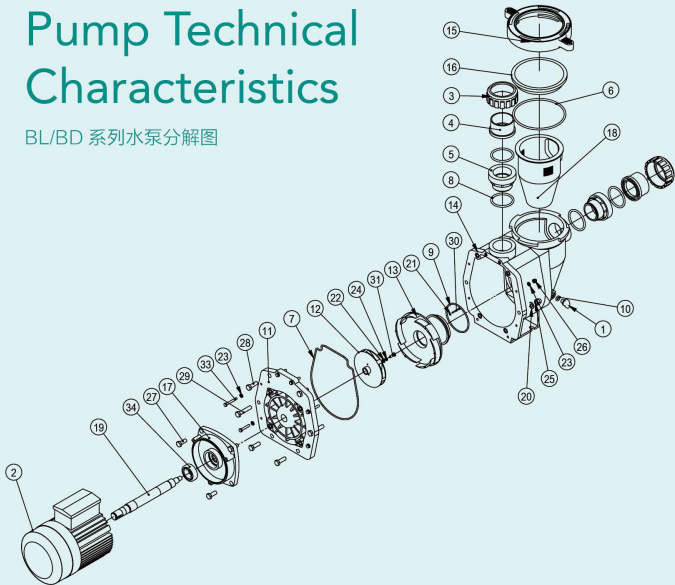

- 01 Plug 螺塞
- 02 Motor 电机
- 03 Union Nut 活接螺母
- 04 Lining 公制衬套
- 05 Union 活接
- 06 O ring O 型圈
- 07 O ring O 型圈
- 08 O ring O 型圈
- 09 O ring O 型圈
- 10 O ring O 型圈
- 11 Flange 槽体法兰
- 12 Impellor 叶轮
- 13 Diffuser 散水器
- 14 Body 桶体
- 15 Cap 大螺母
- 16 Transparent Lid 透明盖
- 17 Flange 法兰
- 18 Filter Net 滤网
- 19 Motor Axis 电机轴
- 20 Washer 垫圈
- 21 Washer 垫圈
- 22 Washer 垫圈
- 23 Washer 垫圈
- 24 Spring Washing 弹性垫圈
- 25 Cap 盖形螺母
- 26 Cap 盖形螺母
- 27 Bolt 螺栓
- 28 Bolt 螺栓
- 29 Bolt 螺栓
- 30 Bolt 螺栓
- 31 Bolt 螺栓
- 32 Bolt 螺栓
- 33 Bolt 螺栓
- 34 Bolt 螺栓


BL/BD 系列水泵

BL/BD Plastic Pump



Anti rust can stop water penetrating to the engine; Enough power; high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability; big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.

防锈保护外壳，防止水分渗入马达内部。功率足、扬程高、水量大，高效率循环。低噪音，运行稳定，泵盖有真空密封性，防漏水性能好，毛发器容量大。水泵主要配件由耐高温低温的高强度塑料制造而成，持久耐用，是别墅·私家及商用泳池、水景、养殖、温泉桑拿浴池的理想选择。




Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
BL-150	220V/50Hz	1.1	1.5	18	25	63 2"
BL-200	220V/380V/50Hz	1.5	2.0	19	30	
BL-300		2.2	3.0	20	35	
BL-400		3.0	4.0	22	45	
BD-200	220V/380V/50Hz	1.5	2.0	18	35	
BD-300		2.2	3.0	20	40	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

BL/BD Water Pump Technical Characteristics

BL/BD 系列水泵分解图

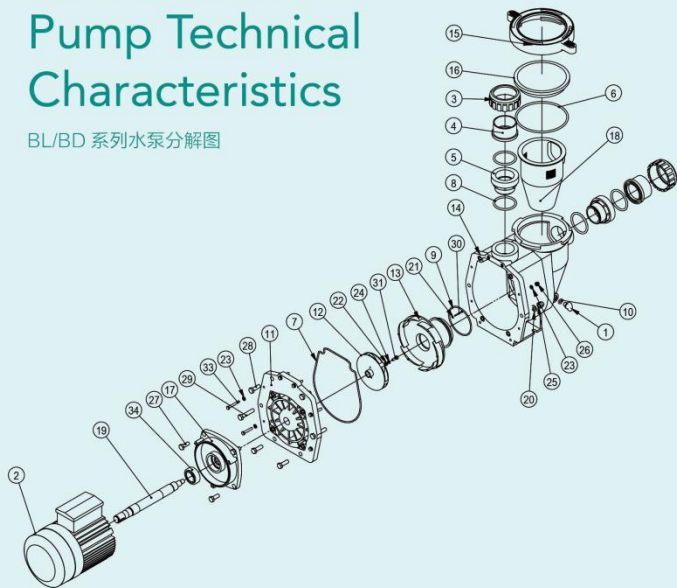

- 01 Plug 螺塞
- 02 Motor 电机
- 03 Union Nut 活接螺母
- 04 Lining 公制衬套
- 05 Union 活接
- 06 O ring O 型圈
- 07 O ring O 型圈
- 08 O ring O 型圈
- 09 O ring O 型圈
- 10 O ring O 型圈
- 11 Flange 桶体法兰
- 12 Impellor 叶轮
- 13 Diffuser 散水器
- 14 Body 桶体
- 15 Cap 大螺母
- 16 Transparent Lid 透明盖
- 17 Flange 法兰
- 18 Filter Net 滤网
- 19 Motor Axis 电机轴
- 20 Washer 垫圈
- 21 Washer 垫圈
- 22 Washer 垫圈
- 23 Washer 垫圈
- 24 Spring Washing 弹性垫圈
- 25 Cap 盖形螺母
- 26 Cap 盖形螺母
- 27 Bolt 螺栓
- 28 Bolt 螺栓
- 29 Bolt 螺栓
- 30 Bolt 螺栓
- 31 Bolt 螺栓
- 32 Bolt 螺栓
- 33 Bolt 螺栓
- 34 Bolt 螺栓



HL 型水泵

HL Water Pump



Classic design of Europe style, 20 years popular in the market. Small power use, high hight, big flow and low noise. Pump is made in high strong plastic, long time lasting and small space occupied. Special material for impeller and filter net. Spindle is 304 stainless steel. Bearings from American KIMIKEN brand, and sealing is Vulcan brand. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

欧美设计风格，技术成熟，风靡市场 20 年的经典款，能耗小，扬程高、流量大、运行噪音低；泵体采用高强度塑料制造，体积小，坚固耐用；叶轮、过滤网采用特殊塑料材料制造；电机转轴为不锈钢 304；轴承采用美国 KIMIKEN 机械密封采用伏尔肯品牌；操作简便，使用方便，电机 异步两级；保护等级：IP55；绝缘等级：F。

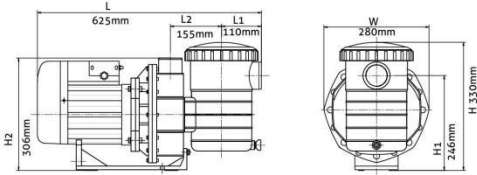


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HL-150	220V/50Hz	1.1	1.5	18	25	63 2"
HL-200		1.5	2.0	19	35	
HL-300	220V/380V/50Hz	2.2	3.0	20	38	
HL-350		2.6	3.5	21	40	
HL-400	380V/50Hz	3.0	4.0	22	45	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

HL Water Pump Technical Characteristics

HL 型水泵分解图

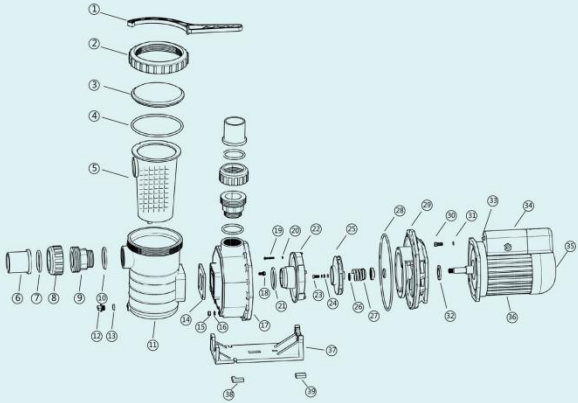

- 01 Plastic Spanner 塑料扳手

02 Lid Lock Ring 大螺帽

03 Lid 透明盖

04 O'ring O 型密封圈

05 Basket Strainer 过滤篮

06 Union Bushing(Metric/Inch) 活接衬套 (公英制)

07 O'ring O 型密封圈

08 Union Nut 活接螺帽

09 Union 活接

10 O'ring O 型密封圈

11 Hair collector 过滤桶

12 Drain Plug 排水螺丝

13 O'ring O 型密封圈

14 Gasket 密封垫

15 Screw 螺丝

16 Gasket 垫片

17 Pump Body 泵体

18 Screw 螺丝

19 Screw 螺丝

20 Gasket 垫片

21 O'ring O 型密封圈

22 Diffuser 散水器

23 Screw 螺丝

24 Gasket 垫片

25 Impeller 叶轮

26 Gasket 垫片

27 Shaft Seal 机械密封

28 O'ring O 型密封圈

29 Flange 法兰

30 Screw 螺丝

31 Gasket 垫片

32 Throw Water Ring 甩水环

33 Electric Current Safeguard 过热保护器

34 Junction Box 接线盒

35 Ventilation Hood 后风罩

36 Motor 马达



37 Base 底座

38 Base Cushion 底座减震垫

39 Base Cushion 底座减震垫

HLA 型水泵

HLA Water Pump

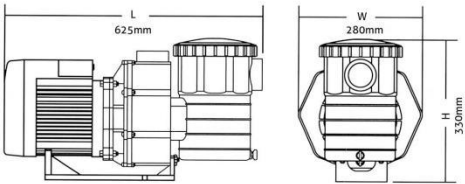

Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.



防锈保护外壳，防止水份渗入马达内部；功率足，扬程高，水量大，高效率循环，噪音小，运行宁静；泵盖有真空密封性，防水性能好，吸污能力强，毛发器容量大；水泵主要配件由耐高温，低温的特殊塑料制成，持久耐用；操作方便，便于维修，有零配件供应。

Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HLA-200	220V/50Hz	1.5	2.0	16	25	63 2"
HLA-300		2.2	3.0	18	28	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

HLD 型水泵

HLD Water Pump

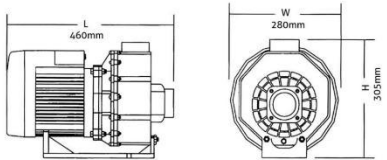

Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. Convenient to hand, easy to maintain. Spare parts available.

防锈保护外壳，防止水份渗入马达内部；功率足，扬程高，水量大，高效率循环，噪音小，运行宁静；泵盖有真空密封性，防水性能好，吸污能力强，毛发器容量大；水泵主要配件由耐高温，低温的特殊塑料制成，持久耐用；操作方便，便于维修，有零配件供应。

Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径
HLD-150	220V/50Hz	1.1	1.5	18	30	63 2"
HLD-200		1.5	2.0	19	35	
HLD-300	220V/380V/50Hz	2.2	3.0	20	38	
HLD-350		2.6	3.5	21	40	
HLD-400	380V/50Hz	3.0	4.0	22	48	

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.


BLB 大功率塑料泵

BLB Type Metal Water Pump



Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed, strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for both private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.

防锈保护外壳，防止水分渗入马达内部。功率足、扬程高、水量大，高效率循环。低噪音，运行稳定。泵盖有真空密封性，防水性能好，毛发器容量大。水泵主要配件由耐高低温的高强度塑料制造而成。持久耐用，是别墅·私家及商用泳池、水景、养殖、温泉桑拿浴池的理想选择。

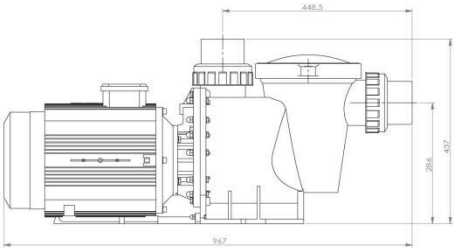


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)	Motor Speed (r/min)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径	电机转速
BLB-40	380V/50Hz	3	4	18	48	90 3.0"	2800
BLB-55		4	5.5	19	60		
BLB-75		5.5	7.5	20	80		
BLB-100		7.5	10	21	95		
BLB-150		11	15	21	110		

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

BLB Water Pump Technical Characteristics


BLB 系列水泵分解图

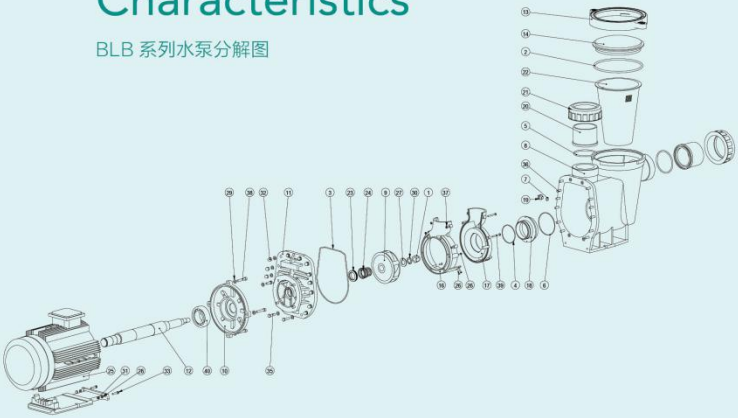

- 01 Cap 盖形螺母
- 02 O ring O 型圈
- 03 O ring O 型圈
- 04 O ring O 型圈
- 05 O ring O 型圈
- 06 O ring O 型圈
- 07 O ring O 型圈
- 08 Pump 泵体
- 09 Impeller 叶轮
- 10 Flange 铝法兰
- 11 Flange 法兰
- 12 Motor Axis 电机轴
- 13 Cap 大螺母
- 14 Transparent 透明盖
- 15 Base 底座
- 16 Throw Water Ring 甩水器
- 17 Throw Water Ring 甩水器
- 18 Port 接口
- 19 Bolt 螺母
- 20 Lining 衬套
- 21 Union Cap 活接端盖
- 22 Filter PL 滤网
- 23 Ring 静环
- 24 Ring Union 动环结合件
- 25 Motor 电机
- 26 Bolt 十字槽沉头螺钉
- 27 Washer 垫圈
- 28 Washer 垫圈
- 29 Washer 垫圈
- 30 Spring Washer 弹性垫圈
- 31 Cap 盖形螺母
- 32 Cap 盖形螺母
- 33 Bolt 螺栓
- 34 Bolt 螺栓
- 35 Bolt 螺栓
- 36 Bolt 螺栓
- 37 Cap 螺母
- 38 Nut 螺母
- 39 Nut 螺母
- 40 Bearing 轴承

SUP 系列塑料水泵


SUP Type Plastic Water Pump

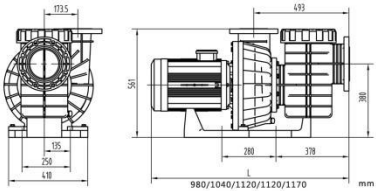

SUP self-priming super flow plastic water pump, brand new patented product, adopts the bionic turbo pump body design, maximize the conversion of motor efficiency to delivering massive & smoothly flow, max flow rate up to 260m3/h. Thickening body and spiral lock design, excellent bearing pressure performance , sturdy and durable. Using four-pole motor, RPM 1450, NSK imported bearing, carbonbrundum +graphite mechanical seal, motor operating more stable and quiet; IP55 protection grade, F insulation grade, rainproof standard; Split component design, flange type inlet and outlet, easy to install and operate, easy to maintenance, all spare parts available;Suitable for large waterparks, large swimming pools, aquaculture, water conservancy projects.

SUP新型专利设计自吸式大流量塑料水泵，采用仿生涡轮式泵体设计，最大限度的转化电机功效，使水体输送更流畅流量更大，最大流量可达260m3/h；加厚箱体及过滤盖螺旋锁扣式设计，水泵承压效果更出色，坚固耐用；采用四级电机，转速1450，NSK进口轴承，高品质机械密封，电机运行更稳定更静音；IP55 防护等级，F 绝缘等级，不积尘心户外雨淋，分体式设计，法兰式大口径进出口，安装方便，操作简单，利于维护，所有零部件均可供应；适用于大型海水大型水上乐园，大型泳池，水海洋养殖，水利工程等。

Model	Voltage (V)	Power		Hmax (m)	Qmax (m³/h)	Motor Speed (r/min)	Port Size (mm)	Outlet Pipe Diameter (mm)
型号	电压	KW	HP	最大扬程	最大流量	电机转速	进出口口径	出水口径
SUP-100	380V/50Hz	7.5	10.0	18	170	1450	Φ150	Φ125
SUP-150		11.0	15.0		185			
SUP-200		15	20		220			
SUP-250		18.5	25		240			
SUP-300		22	30		260			



以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

SUP Water Pump Technical Characteristics

SUP系列水泵分解图



- 1 Motor 电机
- 2 Plug Screw 螺栓
- 3 Washer 垫圈
- 4 Flange 法兰
- 5 O Ring O型密封圈
- 6 Mechanical Seal 机械密封
- 7 Flange 法兰
- 8 Washer 平垫圈
- 9 Elastic Washer 弹性垫圈
- 10 Screw Cap 盖型螺母
- 11 Body 泵体
- 12 Plug Screw 螺栓
- 13 Washer 垫圈
- 14 Base 底座
- 15 O Ring O型密封圈
- 16 Plug Screw 螺塞
- 17 Washer 平垫圈
- 18 Screw 螺栓
- 19 O Ring O型密封圈
- 20 Pre-Filter 桶体
- 21 Basket 过滤篮
- 22 O Ring O型密封圈
- 23 Transparent Cover 透明盖
- 24 Cap Nut 大螺母


CU 系列不锈钢泵

CU Type Metal Water Pump



Swimming pool stainless steel pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in 304 steel. Long time lasting and anti corrosion. Impeller and filter nets are also steel. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

泳池不锈钢水泵能耗小，扬程高，流量大，运行噪音低。泵体采用 304 不锈钢铸造，坚固耐腐蚀；叶轮，过滤网采用不锈钢材料制造。电机转轴为不锈钢 304。操作简单，使用方便，维修容易，有零配件供应。防护等级 IP55，绝缘等级 F。

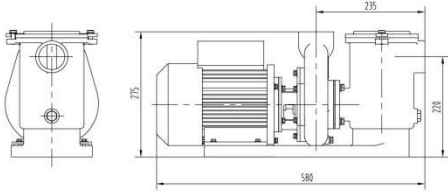


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)	Motor Speed (r/min)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径	电机转速
CU-200	220V/380V	1.5	2	18	35		
CU-300	50Hz	2.2	2	19	40	65 2"	2800
CU-400	380V/50Hz	3	4	20	45		

以上数据仅供参考，以每次出货产品数据为准

Above size only for reference, pls take shipping products size as correct.

CU Water Pump Technical Characteristics

CU 系列水泵分解图

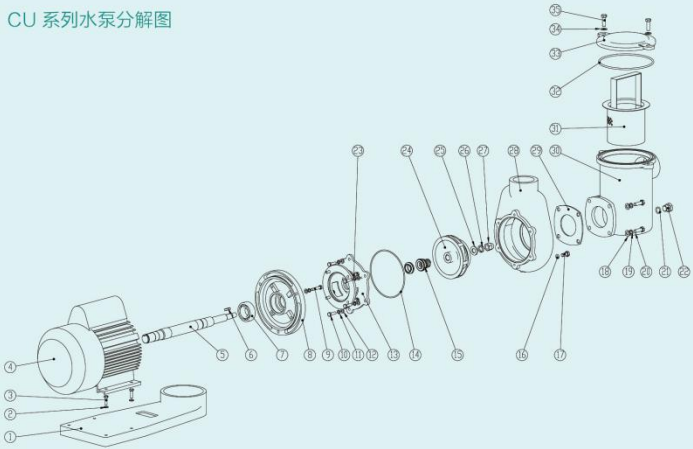

- 01 T shape bolt T 型螺钉
- 01 Base 底座
- 02 Washer 垫圈
- 03 Bolt 螺栓
- 04 Motor 电机
- 05 Motor Axis 电机轴
- 06 Button 键
- 07 Bearing 轴承
- 08 Flange 电机法兰
- 09 Bolt 螺栓
- 10 Bolt 螺栓
- 11 Washer 平垫圈
- 12 Spring Washer 弹性垫圈
- 13 Flange 法兰
- 14 O ring O 型密封圈
- 15 Mechanical Seal 机械密封
- 16 Washer 垫圈
- 17 Bolt 螺栓
- 18 Washer 垫圈
- 19 Washer 弹性垫圈
- 20 Bolt 螺栓
- 21 O ring O 型密封圈
- 22 Plug 塞
- 23 Bolt 螺栓
- 24 Impeller 叶轮
- 25 Washer 垫圈
- 26 Spring Washer 弹性垫圈
- 27 Cap 螺母
- 28 Pump Body 泵体
- 29 Seal Cushion 密封垫
- 30 Body 桶体
- 31 Filter Basket 过滤篮
- 32 O ring O 型密封圈
- 33 Lid Cover 桶体盖
- 34 Cushion 垫圈
- 35 Bolt 螺栓


CUD 系列不锈钢泵 (含毛发收集器)

CUD Type Metal Water Pump



Swimming pool stainless steel pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in 304 steel. Long time letting and anti corrosion. Impeller and filter nets are also steel. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

泳池不锈钢水泵能耗小，扬程高，流量大，运行噪音低。泵体采用 304 不锈钢铸造，坚固耐腐蚀；叶轮，过滤网采用不锈钢材料制造。电机转轴为不锈钢 304。操作简单，使用方便，维修容易，有零配件供应。防护等级 IP55，绝缘等级 F。

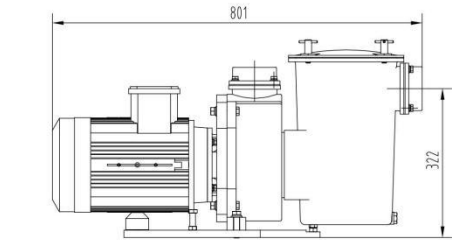


Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)	Motor Speed (r/min)
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径	电机转速
CUD-40	380V/50Hz	3	4	18	48	90 3.0"	2800
CUD-55		4	5.5	19	60		
CUD-75		5.5	7.5	20	80		
CUD-100		7.5	10	21	95		
CUD-150		11	15	22	110		

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

CUD Water Pump Technical Characteristics


CUD 系列水泵分解图

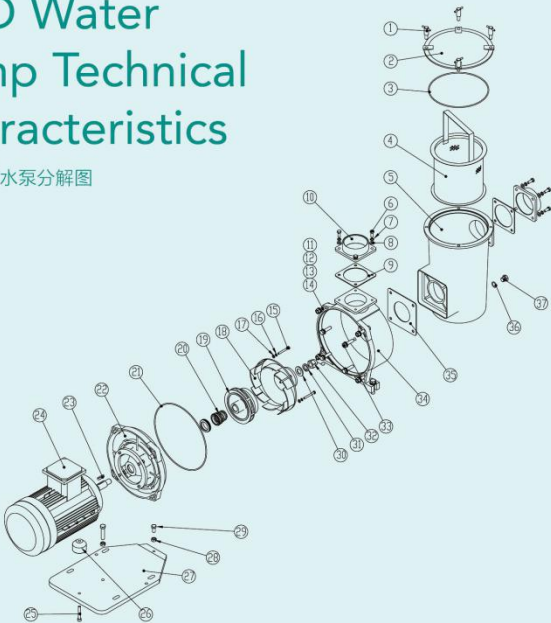

- 01 T shape bolt T 型螺钉
- 02 Body Cover 桶体盖
- 03 O ring O 型密封圈
- 04 Hair Collector 过滤蓝
- 05 Body 桶体
- 06 Bolt 螺栓
- 07 Spring Washer 弹性垫圈
- 08 Cushion Washer 平垫圈
- 09 Rubber Washer 橡胶垫片
- 10 Flange 法兰
- 11 Bolt 螺栓
- 12 Cap 螺母
- 13 Cushion Washer 平垫圈
- 14 Spring Washer 弹性垫圈
- 15 Bolt 螺栓
- 16 Spring Washer 弹性垫圈
- 17 Cushion Washer 平垫圈
- 18 Throw Water Ring 甩水圈
- 19 Impellor 叶轮
- 20 Machanical Seal 机械密封
- 21 O ring O 型密封圈
- 22 Flange 法兰
- 23 Cushion 平键
- 24 Motor 电机
- 25 Hexagonal Nut 内六角螺钉
- 26 Motor Cushion 电机垫块
- 27 Base 底板
- 28 Cap 螺母
- 29 Bolt 螺栓
- 30 Washer 平垫圈
- 31 Spring Washer 弹性垫圈
- 32 Cap 盖形螺母
- 33 Bolt 螺栓
- 34 Body 泵体
- 35 Rubber Washer 橡胶垫片
- 36 O ring O 型密封圈
- 37 Bolt 螺母

FD 系列铁水泵

FD Type Metal Water Pump



Swimming pool casting iron pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in casting iron. Long time lasting . Impeller and filter nets are steel material. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

泳池铸铁水泵能耗小, 扬程高, 流量大, 运行噪音低; 泵体采用生铁铸造, 坚固耐用; 叶轮, 过滤网采用不锈钢材料制造; 电机转轴为不锈钢 304 ; 操作简单, 使用方便, 维修容易, 有零配件供应; 防护等级 IP55; 绝缘等级 F。


Model	Voltage (V)	Power		Hmax (m)	Qmax (m³/h)	Motor Speed (r/min)	Port Size (mm)	Inlet Pipe Flange (mm)	Outlet Pipe Diameter (mm)	Outlet Pipe Flange (mm)
型号	电压	KW	HP	最大扬程	最大流量	电机转速	进出口口径	进水口法兰	出水口径	出水口法兰
FD-40	380V/50Hz	3.0	4.0	14	48	1450	Φ86	4-Φ12 Φ90	Φ63	4-Φ18 Φ75
FD-55		4.0	5.5	16	60					
FD-75		5.5	7.5	18	75		Φ100	8-Φ18 Φ110	Φ80	4-Φ18 Φ90
FD-100		7.5	10.0	20	120					
FD-150		11.0	15.0	22	160					

以上数据仅供参考, 以每次出货产品数据为准

Above size only for reference ,pls take shipping products size as correct.


FD Water Pump Technical Characteristics

FD 系列水泵分解图

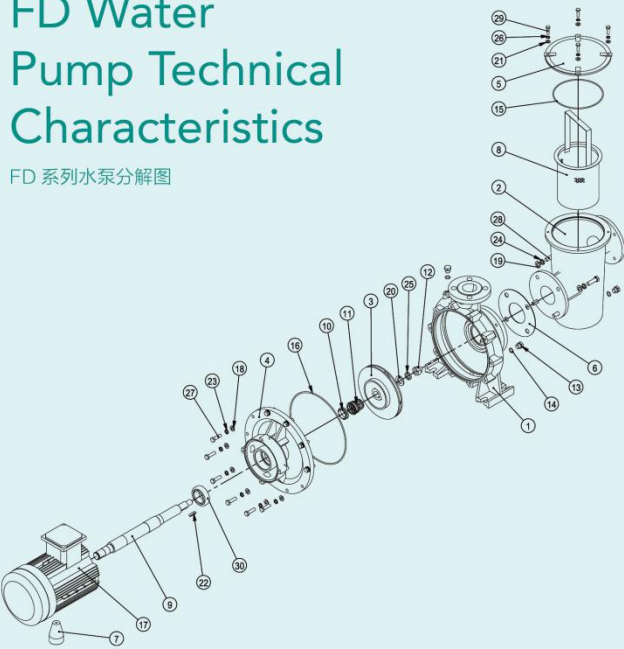

- 01 Pump 泵体
- 02 Body 泵体
- 03 Impeller 叶轮
- 04 Flange 法兰
- 05 Body 泵体盖
- 06 Seal Ring 密封圈
- 07 Motor Cushion 电机垫块
- 08 Filter Basket 过滤篮
- 09 Iron Motor Axis 铁泵电机轴
- 10 Union Ring 静环结合件
- 11 Union Ring 动环结合件
- 12 Cap 盖型螺母
- 13 Bolt 螺栓
- 14 O ring O 型圈
- 15 O ring O 型圈
- 16 O ring O 型圈
- 17 Motor 电机
- 18 Washer 垫圈
- 19 Washer 垫圈
- 20 Washer 垫圈
- 21 Washer 垫圈
- 22 Cushion 平键
- 23 Spring Washer 弹性垫圈
- 24 Spring Washer 弹性垫圈
- 25 Spring Washer 弹性垫圈
- 26 Spring Washer 弹性垫圈
- 27 Bolt 螺栓
- 28 Bolt 螺栓
- 29 Bolt 螺栓
- 30 Bearing 轴承

FDU Type Metal Water Pump



Swimming pool casting iron pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in casting iron. Long time lasting. Impeller and filter nets are steel material. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

泳池铸铁水泵能耗小, 扬程高, 流量大, 运行噪音低; 泵体采用生铁铸造, 坚固耐用; 叶轮, 过滤网采用不锈钢材料制造; 电机转轴为不锈钢 304; 操作简单, 使用方便, 维修容易, 有零配件供应; 防护等级 IP55; 绝缘等级 F。


Model	Voltage (V)	Power		Hmax (m)	Qmax (m³/h)	Motor Speed (r/min)	Port Size (mm)	Inlet Pipe Flange (mm)	Outlet Pipe Diameter (mm)	Outlet Pipe Flange (mm)			
型号	电压	KW	HP	最大扬程	最大流量	电机转速	进出口口径	进水口法兰	出水口径	出水口法兰			
FDU-40	380V/50Hz	3.0	4.0	14	48	1450	Φ100	8-Φ18 Φ110	Φ63	4-Φ18 Φ75			
FDU-55		4.0	5.5	16	60								
FDU-75		5.5	7.5	18	75								
FDU-100		7.5	10.0	20	120				Φ80	4-Φ18 Φ90			
FDU-150		11.0	15.0	22	160		Φ125						
FDU-200		15	20	20	170								
FDU-250		18.5	25	21	200								
FDU-300		22	30	21	230		Φ160		Φ125				

以上数据仅供参考, 以每次出货产品数据为准

Above size only for reference ,pls take shipping products size as correct.

FDU Water Pump Technical Characteristics

FDU 系列水泵分解图

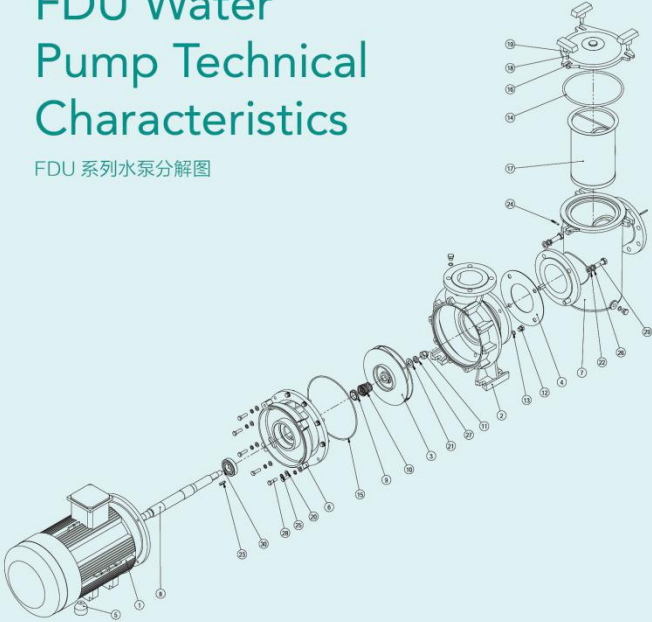

- 01 Motor 电机
- 02 Pump Body 泵体
- 03 Impeller 叶轮
- 04 O ring O 密封圈
- 05 Cushion 电机垫块
- 06 Flange 法兰
- 07 Body 泵体
- 08 Iron Motor Axis 铁泵电机轴
- 09 Union 静环结合件
- 10 Union 动环结合件
- 11 Cap 盖形螺母
- 12 Bolt 螺栓
- 13 O ring O 密封圈
- 14 O ring O 密封圈
- 15 O ring O 密封圈
- 16 Cap 盖
- 17 Filter Union 滤网结合件
- 18 Bolt 螺栓
- 19 Cap 螺母
- 20 Washer 垫圈
- 21 Washer 垫圈
- 22 Washer 垫圈
- 23 Button 平键
- 24 Spring Nut 弹性圈柱销
- 25 Spring Washer 弹性垫圈
- 26 Spring Washer 弹性垫圈
- 27 Spring Washer 弹性垫圈
- 28 Bolt 螺栓
- 29 Bolt 螺栓
- 30 Bearing 轴承

FU 系列铁水泵

FU Type Metal Water Pump



Model	Voltage (V)	Power		Hmax (m)	Qmax (m³/h)	Motor Speed (r/min)	Port Size (mm)	Inlet Pipe Flange (mm)	Outlet Pipe Diameter (mm)	Outlet Pipe Flange (mm)
型号	电压	KW	HP	最大扬程	最大流量	电机转速	进水口径	进水口法兰	出水口径	出水口法兰
FU-40	380V/50Hz	3.0	4.0	14	48	2880	Φ100	4-Φ18 Φ110	Φ63	4-Φ18 Φ75
FU-55		4.0	5.5	16	60					
FU-75		5.5	7.5	18	75					
FU-100		7.5	10.0	19	120				Φ80	4-Φ18 Φ90
FU-150		11.0	15.0	20	160					


Swimming pool casting iron pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in casting iron. Long time lasting . Impeller and filter nets are steel material. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F

泳池铸铁水泵能耗小，扬程高，流量大，运行噪音低；泵体采用生铁铸造，坚固耐用；叶轮，过滤网采用不锈钢材料制造；电机转轴为不锈钢 304；操作简单，使用方便，维修容易，有零配件供应；防护等级 IP55；绝缘等级 F。

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

FU Water Pump Technical Characteristics


FU 系列水泵分解图

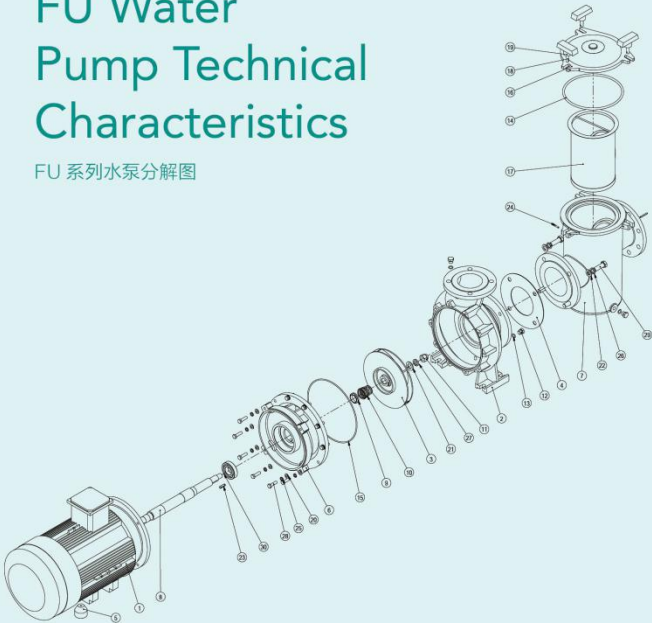

- 01 Motor 电机
- 02 Pump Body 泵体
- 03 Impellor 叶轮
- 04 O ring O 密封圈
- 05 Cushion 电机垫块
- 06 Flange 法兰
- 07 Body 泵体
- 08 Iron Motor Axis 铁泵电机轴
- 09 Union 静环结合件
- 10 Union 动环结合件
- 11 Cap 盖形螺母
- 12 Bolt 螺栓
- 13 O ring O 型圈
- 14 O ring O 型圈
- 15 O ring O 型圈
- 16 Cap 盖盖
- 17 Filter Union 滤网结合件
- 18 Bolt 螺栓
- 19 Cap 螺母
- 20 Washer 垫圈
- 21 Washer 垫圈
- 22 Washer 垫圈
- 23 Button 平键
- 24 Spring Nut 弹性圈柱销
- 25 Spring Washer 弹性垫圈
- 26 Spring Washer 弹性垫圈
- 27 Spring Washer 弹性垫圈
- 28 Bolt 螺栓
- 29 Bolt 螺栓
- 30 Bearing 轴承

H/HS 系列铸铁泵

H/HS Type Metal Water Pump



Swimming pool casting iron pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in casting iron. Long time lasting. Impeller and filter nets are steel material. Convenient to hand, easy to maintain. Spare parts available. Protect grade: IP55; Insulation Grade:F


泳池铸铁水泵能耗小，扬程高，流量大，运行噪音低；泵体采用生铁铸造，坚固耐用；叶轮，过滤网采用不锈钢材料制造；电机转轴为不锈钢 304；操作简单，使用方便，维修容易，有零配件供应；防护等级 IP55；绝缘等级 F。

Model	Voltage	Power		Hmax (m)	Qmax (m³/h)	Port Size (mm)	Motor Speed (r/min)	L	H	A	B	
型号	电压 (V)	KW	HP	最大扬程	最大流量	管径	电机转速	(mm)	(mm)	(mm)	(mm)	
H5-30	380V/50Hz	2.2	3	18	38	75 2.5"	2800	578	328	122	82	
H5-40		3	4	19	42			579				
H5-50		3.8	5	20	50			645				
H-40		3	4	18	48	90 3.0"		753.55	444	196	177	
H-55		4	5.5	19	60			752.55				
H-75		5.5	7.5	20	80			818.55				
H-100		7.5	10	21	95							
H-150		11	15	22	110							

以上数据仅供参考，以每次出货产品数据为准
Above size only for reference ,pls take shipping products size as correct.

H/HS Water Pump Technical Characteristics

H/HS 系列水泵分解图

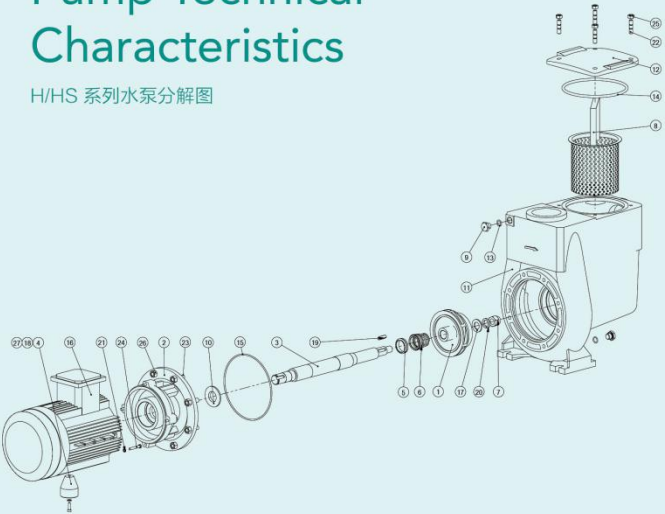

- 01 Impellor 叶轮
- 02 Flange 法兰
- 03 Motor Axis 电机轴
- 04 Cushion 电机垫块
- 05 Union 静环结合件
- 06 Union 动环结合件
- 07 Cap 盖型螺母
- 08 Filter Union 滤网结合件
- 09 Plug 螺塞
- 10 Throw Water Ring 甩水环
- 11 Body 泵体
- 12 Pump 泵盖
- 13 O ring O 型圈
- 14 O ring O 型圈
- 15 O ring O 型圈
- 16 Motor 电机
- 17 Cushion 垫圈
- 18 Cushion 垫圈
- 19 Cushion 平键
- 20 Spring Washer 弹性垫圈
- 21 Spring Washer 弹性垫圈
- 22 Plug 螺柱
- 23 Plug 螺柱
- 24 Plug 螺栓
- 25 Cap 螺母
- 26 Cap 螺母
- 27 Bolt 螺钉

HL Type Pump Accessories

HL 型水泵配件




CS888062
塑料把手



CS888063
大叶轮



CS888064
叶轮盖



CS888065
透明圆 O 型密封圈 (硅胶)



CS888066
过滤器



CS888067
过滤器




CS888068
小叶轮盖



CS888069
泵体



CS888070
过流栅方型垫片



CS888071
潜水圆 O 型密封圈 (硅胶)



CS888072
过滤器



CS888073
叶轮

HL Type Pump Accessories


HL 型水泵配件



CS888074
电机密封



CS888075
塑料法兰



CS888076
法兰 O 型密封圈 (硅胶)



CS888077
叶轮盖



CS888078
电机



CS888079
过载保护开关



CS888080
电机后向叶



CS888081
电机后风罩



CS888082
用水环



CS888083
轴承 (进口 TIMKEN)



CS888084
底座



CS888085
流量减阻器



CS888086
软管 (公英制可适配)



CS888087
潜水 O 型密封圈 (硅胶)

HQS-HQ Type Pump Accessories

HQS-HQ 型水泵配件



CS888037

塑料扳手




CS888038

大垫圈



CS888039

透明盖



CS888040

透明盖 O 型密封圈 (硅胶)



CS888041

过滤网




CS888042

排水螺丝



CS888043

泵体



CS888044

散水器 O 型密封圈 (硅胶)



CS888045

散水器



CS888046

叶轮



CS888047

机械密封



CS888048

与电机连接法兰


HQS-HQ Type Pump Accessories

HQS-HQ 型水泵配件



CS888049

与泵体连接法兰



CS888050

法兰 O 型密封圈 (硅胶)



CS888051

接线盒



CS888052

电容



CS888053

过载保护开关



CS888054

电机后风叶




CS888055

HQS 型电机后风罩



CS888056

抱水环



CS888057

轴承 (进口 TIMKEN)



CS888058

HQS 型水泵底座



CS888059

HQ 型水泵底座



CS888060

活瓣 (公制制可选配)



CS888061

活瓣 O 型密封圈 (硅胶)